


# Sliding Panel Systems





## Curved Panel Glide System

# Silent Gliss® 2730 Flex

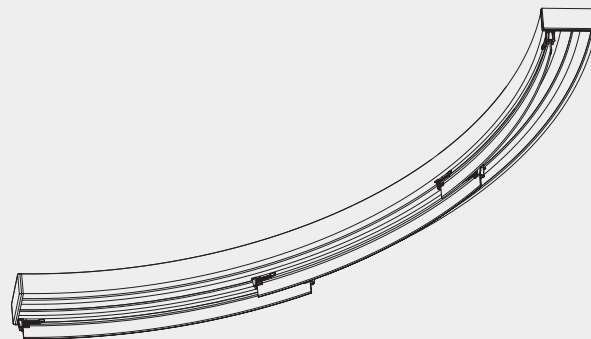

### Product Information


- Innovative Panel Glide System that can be curved
- A truly unique system of two or more sliding panels for use as a window or wall dressing, or room divider
- Can be bent to a minimum radius of 15cm
- Flexible carriers allow for smooth and silent operation
- Hand operated
- Panels can be easily removed for cleaning or to change decor
- Delivered ready assembled
- Wide selection of Silent Gliss fabrics available for this system



2730

## Profile and Bending and Specification Information

### 2 channel profile




10132



15cm

### 3 channel profile




10133



15cm

### 4 channel profile




10134



15cm

### 5 channel profile



10135




15cm

Specification Guide - download from [www.silentgliss.co.uk](http://www.silentgliss.co.uk) (password required). Silent Gliss 2730 Flex system complete and assembled comprising tracks 10132/10133/10134/10135 as necessary with carrier 10180, bottom weight 10233 and all necessary fittings to provide a fully working panel flex system .....m o/a drop ..... arranged to stack right hand single/left hand single/pair/centre stack, hand operated with fabric ..... Detail specification to be agreed between architect/interior designer/contractor and Silent Gliss Ltd.

## How to Measure & Panel Dimensions




2730

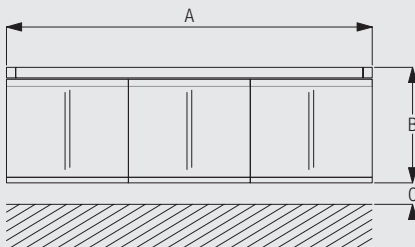

A: System width  
B: System height  
C: Distance between panel and floor: 15mm

$B + C = \text{Total floor to ceiling drop}$

## Dimension of Panels



Panels are suspended from flexible carrier 10180 in the profile channel. The width of the fabric panel can be varied but is normally between 50-100cm. The overlap of 12cm is fixed.

Panels should not exceed 2kg per metre including bottom bars.

**Note:** the minimum stack size on a single stack will be the width of one panel. For pair stack it will be width of one panel on each side.

## System Dimensions



unlimited  
(unconnected panels)  
6m (connected panels)



3m



max. 200g per roller  
glider (incl. weight bar)


The system dimension depends mainly on the operation method and the fabric weight.

For hand operated (unconnected panels), the system length is unlimited.

The maximum drop of the system should not exceed 3m.


## Operating Methods & Stacking Variations

### Hand operated (unconnected panels)




Draw rods optional.

### Hand operated by draw rod (connected panels)

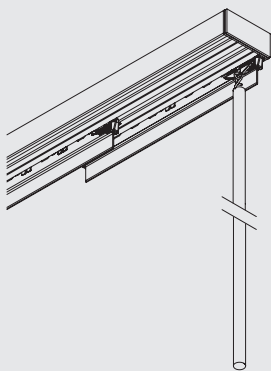

### Single stack right or left (open / closed)



### Centre stack (open / closed)




### Pair stack (open / closed)



2730

Other variations are possible. Same splitting for curved profiles.

### Fascia option




The fascia option allows you to cover the profile and workings of the system in an elegant way.

The fascia components are:

- 10399 Fascia
- 10398 Magnetic tape for fascia
- 10396 End cap for fascia

Fascia height is 55mm.

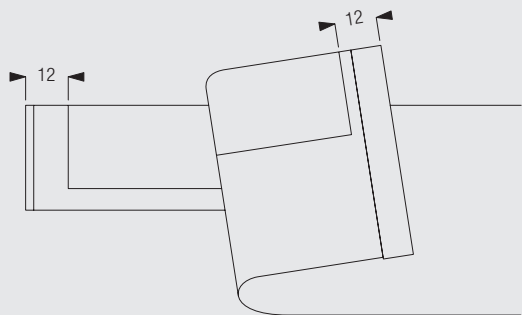

Distance from magnetic tape 10398 to the end of profile / fascia is 12mm.

### Fitting Information


#### Bracket positioning



2730


### Fitting Options

#### Ceiling fix with screw

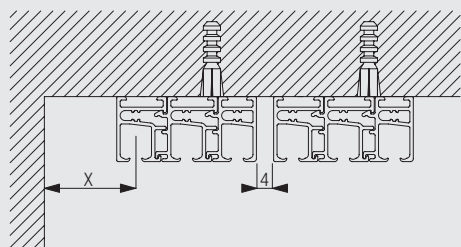


X = depending on room conditions


## Wall fix with brackets 10269-72 and slot nut 10160




	X (mm) (10132)	X (mm) (10133)	X (mm) (10134)	X (mm) (10135)
10269	50	32	-	-
10270	70	52	34	-
10271	90	72	44	36
10272	110	92	64	56



10269-72  
Brackets



3133  
Bracket cover  
(60mm)



10160  
Slot nut

When profile 10134 is used, bracket 10269 is not applicable.


When profile 10135 is used, brackets 10269 and 10270 are not applicable.

## Standard Accessories

10076	Fabric weight		10132	Profile (2 channel)	
10133	Profile (3 channel)		10134	Profile (4 channel)	
10135	Profile (5 channel)		10156	End stop (with screw)	
10162	Cover (for 2 channel profile)		10163	Cover (for 3 channel profile)	
10164	Cover (for 4 channel profile)		10165	Cover (for 5 channel profile)	
10167	Clip left		10168	Clip right	
10179	Profile		10180	Flexible carrier	
10196	Eylet for draw rod		10200	Roller	
10233	Lead weight 100 gr/m		10234	Fabric weight glass	
10237	Clip holder with roller		10239	Angle left with roller	
10241	Angle right with roller		10243	Angle (with screw)	
10244	Slider		10430	Draw rod with hook, 50cm	

2730


10431 Draw rod with hook, 75cm



10432 Draw rod with hook, 100cm



10433 Draw rod with hook, 125cm



10434 Draw rod with hook, 150cm



### Optional Accessories

10160 Slot nut



10177 Connection bridge



10269 Wall bracket (60mm)




10270 Wall bracket (80mm)



10271 Wall bracket (100mm)



10272 Wall bracket (120mm)



10281 Screw



10396 End cap for fascia



10398 Magnetic tape for fascia, 19mm




10399 Fascia




### Useful Measures


10177 Connection bridge




10269 Wall bracket (60mm)




10270 Wall bracket (80mm)



10271 Wall bracket (100mm)




10272 Wall bracket (120mm)



2730






2730



2730



2730

[www.silentgliss.co.uk](http://www.silentgliss.co.uk)

[www.silentglissglobal.com](http://www.silentglissglobal.com)

Silent Gliss Ltd  
Pyramid Business Park  
Poorhole Lane  
Broadstairs  
Kent  
CT10 2PT  
Great Britain

Tel: +44 (0) 1843 863571  
Fax: +44 (0) 1843 864503  
[info@silentgliss.co.uk](mailto:info@silentgliss.co.uk)

Silent Gliss Global Ltd  
Pyramid Business Park  
Poorhole Lane  
Broadstairs  
Kent  
CT10 2PT  
Great Britain

Tel: +44 (0) 1843 874250  
Fax: +44 (0) 1843 874457  
[info@silentglissglobal.com](mailto:info@silentglissglobal.com)